

## K328i (left side windage)


THE GAME-CHANGER



KAHLES



The groundbreaking K328i sets new performance standards with a pioneering new-generation optical design. It offers a 40 % wider field of view\*, an exceptionally comfortable eyepiece and 8x zoom with perfect optical performance across the entire adjustment range.

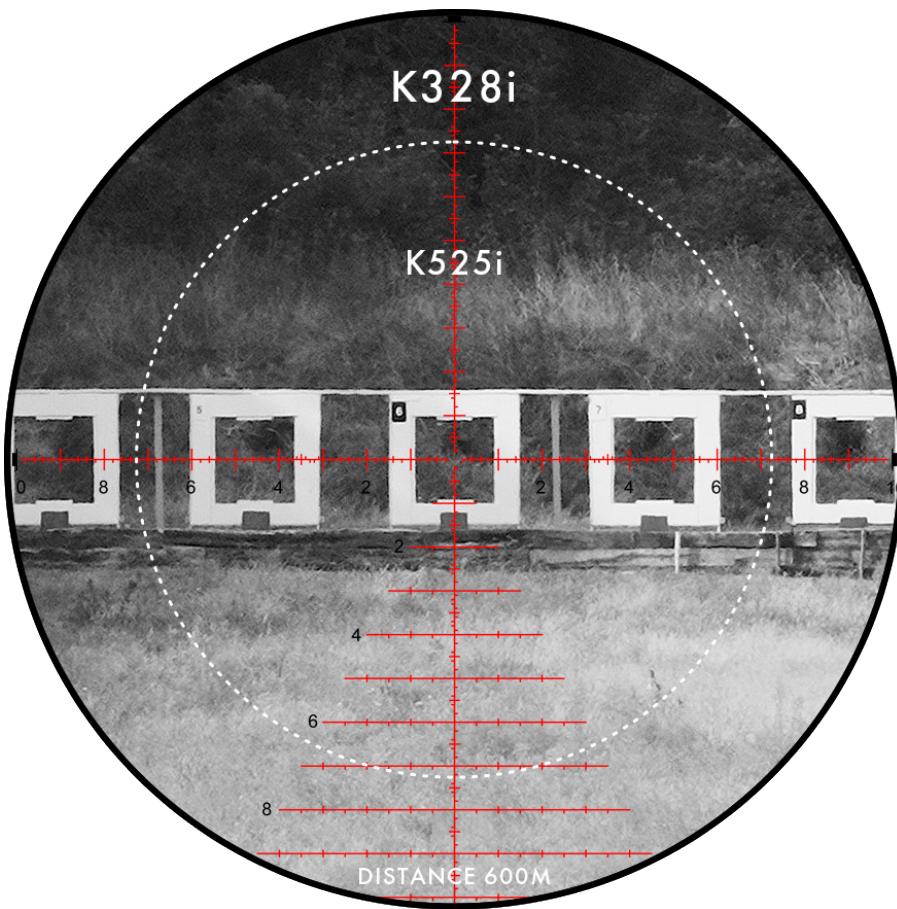

\*) Based on comparison with the K525i at 25x magnification.

**Absolute precision, repeat accuracy and unique handling for maximum performance.**



K328i

PRODUCT  
PRESENTATION

[VIDEO](#)

## PRODUCT HIGHLIGHTS

- Revolutionary optical design with a 40 % wider field of view\* and an exceptional eyepiece
- 8x zoom with perfect optical performance across the entire adjustment range
- Windage adjustment on the left or right with TWIST GUARD rotation protection
- Patented parallax adjustment integrated in the elevation turret (20 m to  $\infty$ )
- Absolutely reliable repeat accuracy and clearly defined clicks
- Precise illuminated reticles in 1st focal plane

## TECHNICAL DATA

Magnification:	3,5 - 28
Objective lens diameter:	50 mm
Exit pupil:	1,8 - 7,4 mm
Eye relief:	92 mm
Field of view:	14,3 - 1,8 m/100 m
Diopter compensation:	+2 / -3 dpt
Twilight factor (DIN 58388):	13,2 - 37,4
Impact correction per click:	.1 MRAD
Adjustment range (E/W):	3,4 / 1,3 m/100 m
Parallax adjustment:	20 m till $\infty$
Tube diameter:	36 mm
Length:	360 mm
Weight:	1040 g
Focal plane:	1.
Illuminated:	Yes
Warranty:	10 (2 electronics)

# FEATURES



1st focal plane



Adjustment direction CW  
or CCW



MIL



Windage left or right



Zero Stop




TWIST GUARD windage




Main tube 36 mm


# RETICLES / SUBTENSIONS




AMR



MSR2/Ki



SKMR+



SKMR4+